Part No: 9210




With the Seismic module you can perform insitu shear wave velocity measurement while you perform a Cone Penetration Test, thus in a cost effective manner.

The seismic module can be used with any Memocone, but requires Corded/Cable operation.



The shear wave velocity is measured during the same "push" as the CPT test, by temporarily halting the CPT push while performing the Seismic test.

The seismic data is presented on a digital oscilloscope.

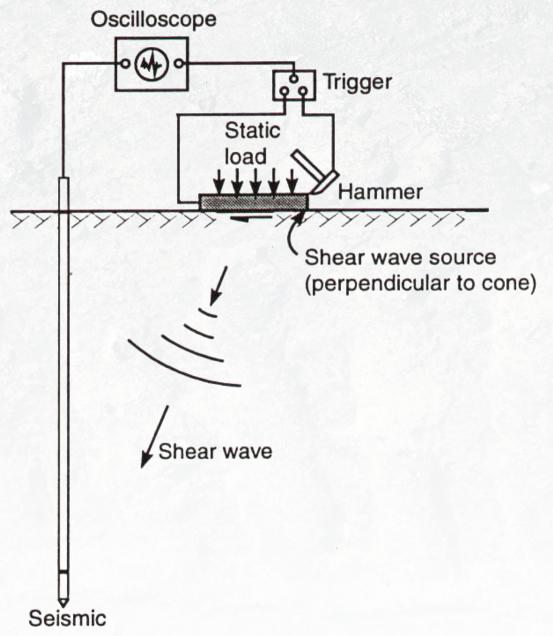

Technical specification

Configuration: Triaxial Sensor type: Accelerometer

Signal type: Analog



Produced, developed and manufactured in Sweden.

